

### Filter media

### Ti 201


M-Web Polyester

#### 1. Features

The Ti 201 filter media is ideal for use in cleanable filter plants. It owes its excellent filtration and cleaning properties to the M-Web Polyester coating. The media combines efficient operation with a low pressure loss and high separation efficiency. Therefore the Ti 201 filter media is especially suitable for filtration of induction air, e.g. vacuum cleaner (wet and dry suction).

#### Characteristics

- Optimum cleaning properties
- Water-resistant
- Low pressure loss
- Long filter life
- Efficient operation
- Compliance with the requirements of DIN EN 60335-2-69
- Worldwide distribution

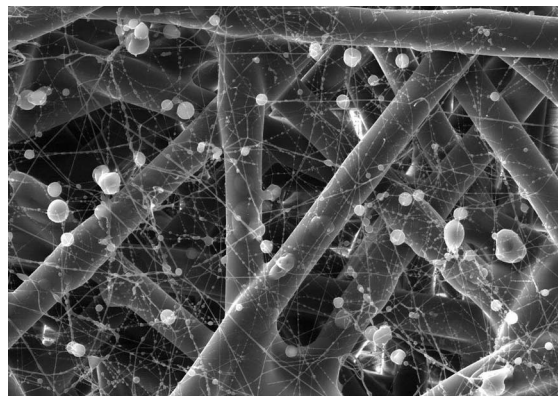


## 2. Technical data

Type	Media	Media thickness [mm]	Weight [g/m <sup>2</sup> ]	Air permeability [l/m <sup>2</sup> s]	max. operating temperature [°C]	Test certificates/ dust classes
Ti 201	Polyester with PET nano fibres	0.6	240	170 at Δp 200 Pa	65 (permanent)	DIN EN 60335-2-69 "M"

Technical data is subject to change without notice!

## 3. Filtration Efficiency

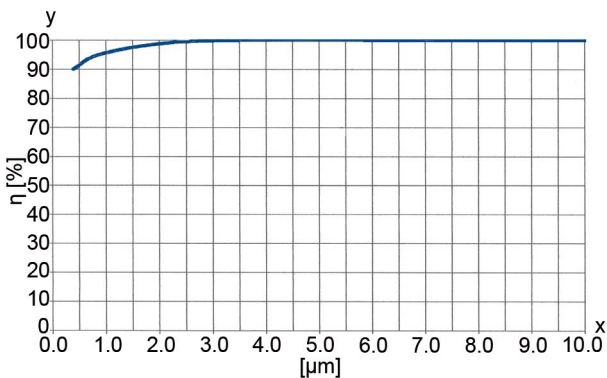

Filtration efficiency: > 99 %  
at 2.5 μm

Test conditions  
Inflow velocity: 3.36 m/h  
Mass concentration: 200 mg/m<sup>3</sup>  
Test dust: Dolomit DRB 20  
(Rock flour)

x = Particle size [μm]  
y = Filtration efficiency η [%]

These values may vary depending on the nature of the dust, the composition of the gas and the cartridge design.

## 4. Chemical resistance/mechanical properties

Chemical resistance	Chemical resistance			Mechanical properties	Mechanical properties		
	Very good	Good	Limited		Very good	Good	Limited
Water		x		Surface quality (smoothness)		x	
Hydrolysis		x		Stability			x
Acids		x		Abrasion resistance			x
Alkalis		x		Cleanability (jet pulse)		x	
Solvents		x		Washability			x

These properties are of a purely qualitative valuation and depending on the nature of the dust, the composition of the gas and the operating conditions.

## 5. Design

Please contact us for detailed technical information, any open questions and for general expert advice. Completion of the relevant questionnaire would facilitate in the coordination of all the important parameters.

Comprehensive documentation on our product range, cleaning units and cartridges can be provided.

MAHLE Filtersysteme GmbH  
Industriefiltration  
Schleifbachweg 45  
D-74613 Öhringen  
Phone +49 (0) 7941/67-0  
Fax +49 (0) 7941/67-23429  
industriefiltration@mahle.com  
www.mahle-industriefiltration.com  
70518375.02/2010